


# B-PAR38™

## ELECTRONIC FLOODLIGHT

## New! Product Information Bulletin

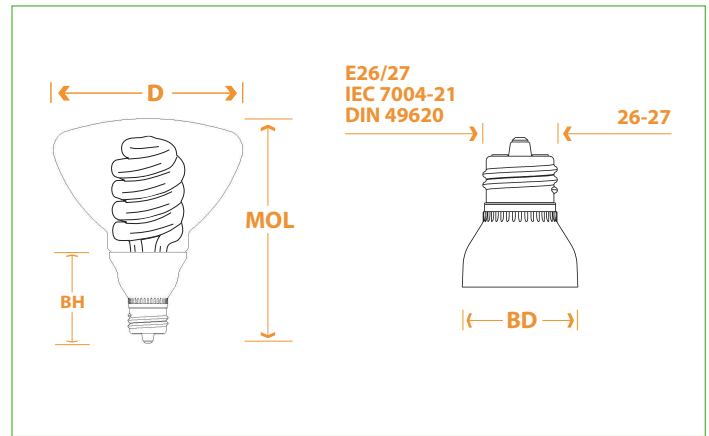

### Technical Data

B-PAR38™ & B-PAR30™ Electronic, NPF, Medium Base (E26/27), 120VAC- 50/60Hz, 10,000 Hours Average Life Incandescent Equivalent

Item Number	Watts	Input Line Current	Power Factor	THD	M.O.L. (Inch)	D (Inch)	BD (Inch)	BH (Inch)	Color Temp. (°K)	CRI	Lumens	Lm/W	Watts	Lumens	Lm/W
33823	23	0.360 A	>0.50	<150%	5.50	4.75	2	2.35	2850	>82	1150	50	x	x	x
33819*	19	0.310 A	>0.50	<150%	5.50	4.75	2	2.35	2850	>82	950	50	x	x	x
33816	16	0.260 A	>0.50	<150%	5.50	4.75	2	2.35	2850	>82	750	47	65	730	11

APPLICATION INFORMATION: TO BE USED WITH TRACK LIGHTS • RECESSED CANS • WARDROBE CLOSETS • DRIVEWAYS • WALKWAYS • YARDS & GARDENS OPEN & TOTALLY ENCLOSED FIXTURES • USE WITH OCCUPANCY SENSORS MADE BY NEPTUN • AND MORE

### Features and Benefits

- \* Saves up to 70% energy with comparable light output
- \* Color Temperature of 2850°K: Matching Incandescent BPAR bulbs
- \* High Luminous Efficiency: Up to 50 Lm/W
- \* Wide range of operation temperatures: 0°F - 120°F
- \* New! Patented Amalgam Technology: Any working position with stable light output
- \* Energy Star Certified for 10,000 Hours (\*)
- \* Superior Lumen Maintenance
- \* Indoor or Outdoor

NEPTUN LIGHT, Inc.  
 service@neptunlight.com  
 Tel. 1-847-735-8330  
 Toll Free: 1-888-735-8330



© Copyright 2008 NEPTUN LIGHT, Inc.