


T3 HELIX™

ELECTRONIC BULBS

New! Product Information Bulletin

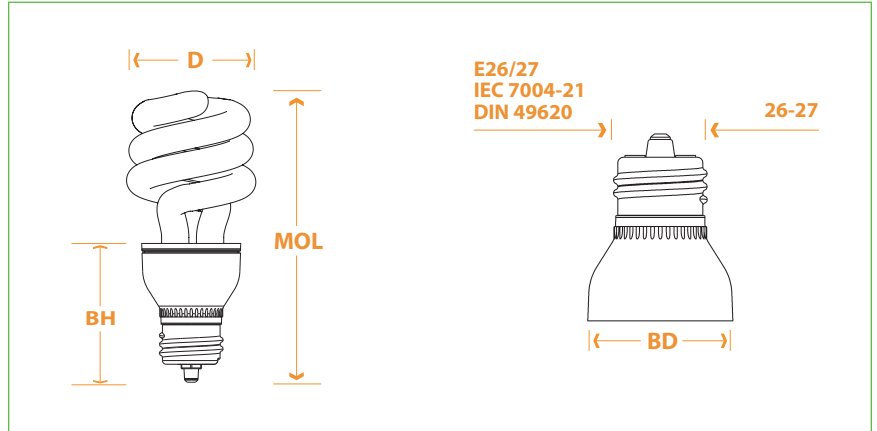

Technical Data

HELIX™ Electronic, NPF, Medium Base (E26/27), 120VAC- 50/60Hz, 8,000 Hours Average Life												Incandescent Equivalent			
Item Number	Watts	Input Line Current	Power Factor	THD	M.O.L. (Inch)	D (Inch)	BD (Inch)	BH (Inch)	Color Temp. (°K)	CRI	Lumens	Lm/W	Watts	Lumens	Lm/W
24509	9	0.150 A	>0.50	<150%	3.95	1.875	1.57	2.0	2750	>82	600	67	40	450	11
24513-35K*	13	0.180 A	>0.50	<150%	4.125	1.875	1.57	2.0	3500	>82	800	62	60	800	13
24514*	14	0.230 A	>0.50	<150%	4.375	1.750	1.50	2.0	2750	>82	925	66	60	900	15
24518*	18	0.300 A	>0.50	<150%	4.750	2.000	1.75	2.0	2750	>82	1200	67	75	1150	15
24524	24	0.400 A	>0.50	<150%	5.000	2.250	1.75	2.5	2750	>82	1600	67	100	1600	16
24528	28	0.455 A	>0.50	<150%	5.250	2.375	1.73	2.5	2750	>82	1850	66	x	x	x
24542	42	0.700 A	>0.50	<150%	6.750	2.880	2.28	2.9	2750	>82	2800	67	200	2400	12

APPLICATION INFORMATION: TO BE USED WITH TABLE LAMPS • PENDANT LAMPS • DESK LAMPS • OUTDOOR FIXTURES • TRACK LIGHTS • RECESSED CANS • WARDROBE CLOSETS • DRIVEWAYS • WALKWAYS • YARDS & GARDENS • OPEN & TOTALLY ENCLOSED FIXTURES • USE WITH OCCUPANCY SENSORS MADE BY NEPTUN • AND MORE

Features and Benefits

- * The most compact CFLs on the market with FULL LIGHT OUTPUT
- * Saves up to 80% energy with comparable light output
- * Color Temperature of 2700°K - 2750°K : Matching Incandescent bulbs
- * High Luminous Efficiency: Up to 67 Lm/W
- * Very long life: Up to 10 times longer than ordinary bulbs
- * New! Patented Amalgam Technology
- * Rapid Start with End of Life Protection and Electronic Preheat
- * Superior Lumen Maintenance

NEPTUN LIGHT, Inc.
 service@neptunlight.com
 Tel. 1-847-735-8330
 Toll Free: 1-888-735-8330



© Copyright 2008 NEPTUN LIGHT, Inc.