

# F32T8 FLUORESCENT LAMPS "800" SERIES

PREMIUM COMMERCIAL GRADE




Item No.	Wattage (W)	Description	Color Temp. (°K)	Average CRI	Average Initial Lumens (Lm)	Lamp Life (Rated)	M.O.L. (Inches)	Pack (Pcs)	Base
18830	32	F32T8 - Linear Fluorescent	3000	82	3100	25,000	48	30	Medium Bi-Pin
18835	32	F32T8 - Linear Fluorescent	3500	82	3100	25,000	48	30	Medium Bi-Pin
18841	32	F32T8 - Linear Fluorescent	4100	82	3100	25,000	48	30	Medium Bi-Pin
18850	32	F32T8 - Linear Fluorescent	5000	82	3100	25,000	48	30	Medium Bi-Pin



## Features and Benefits

- \* Premium Commercial Grade T8 Linear Lamps
- \* Rated Life 25,000 hours, when used with ballasts approved by NEPTUN
- \* 3100 Initial Lumens (Average)
- \* Compatible with motion and occupancy sensors
- \* Low mercury level - lamp is TCLP compliant (< 10mg Hg)
- \* Enhanced CRI (up to 82)
- \* Advanced phosphors provide superior lumen maintenance

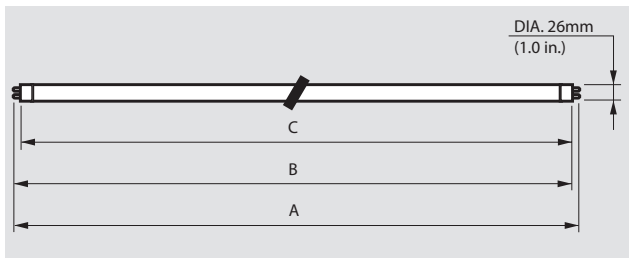

Dimensions in mm (inches)

Lamp Type	A max.	B min.	B max.	C max.
F32T8	1213.6 (47.78)	1204.1 (47.406)	1206.5 (47.5)	1199.4 (47.22)

## Applications:

- \* Office
- \* Hotel/Motel
- \* Schools
- \* Hospitals
- \* Warehouse/Factory
- \* Stores
- \* Industrial lighting
- \* Commercial lighting
- \* Residential lighting

Manufactured under ISO 9002 Standard



**NEPTUN**  
L I G H T®

NEPTUN Light, Inc.  
Questions and Comments:  
service@neptunlight.com  
Toll-Free: 1-888-735-8330



© Copyright 2002-2006 NEPTUN LIGHT, Inc.