



T9 CIRCLINE COMPACT FLUORESCENT LAMP DATA SHEET


Item No.	Description	Lamp Wattage (*)	Incandescent Watts Comparison	Initial Lumens	Glass Tube Diam. (inch/mm)	Lamp O.D. (inch/mm)	Lamp I.D. (inch/mm)
19620	FC6T920W Lamp	20	75	1200	1.14 /29	6.25/159	3.95/100
19822	FC8T922W Lamp	22	90	1400	1.14/ 29	8.12/205	5.85/148
19830	FC8T930W Lamp	30 (*)	120	1800	1.14/ 29	8.12/205	5.85/148
19930	FC9T930W Lamp	30 (*)	125	2000	1.14/ 29	8.75/222	6.50/165
19936	FC9T936W Lamp	36 (*)	150	2200	1.14/ 29	8.75/222	6.50/165

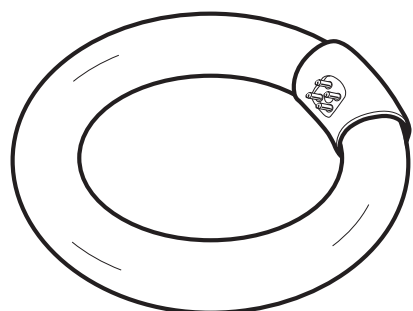

19620

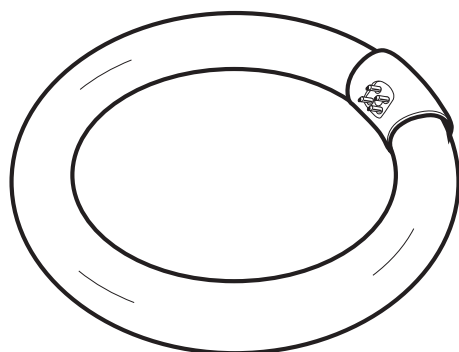

19822
19830

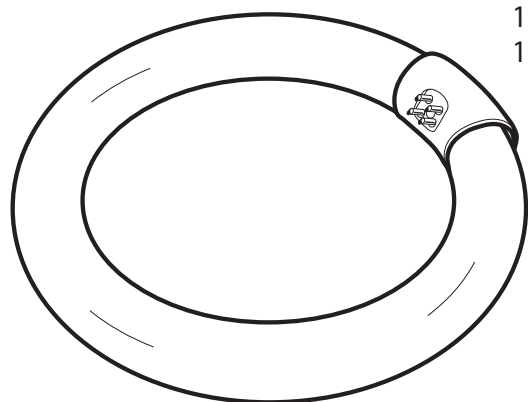

19930
19936

General Specifications (Applicable to all models)

- Operation with Electronic Ballasts Only - where indicated with (*)
- Lamp Life (rated) ----- 10,000 Hours
- Color Temperature ----- 2850°K
- Color Rendering Index ----- 83

Features and Benefits:

- Long life, 10,000 hour average rated lamp life, when operated with ballasts approved by NEPTUN
- Lasts up 7 years, based on 3-4 hours use per day
- Saves up to 75% in energy costs
- Amalgam Technology provides for stable light output
- InstantON (TM) and flicker free start when operated with ballasts approved by NEPTUN

Manufactured under ISO 9002 standard

One Year WARRANTY



NEPTUN
L I G H T

NEPTUN Light, Inc.
Questions and Comments:
service@neptunlight.com
Toll-Free: 1-888-735-8330