


# CFL-R40™ & CFL-R30™ ELECTRONIC FLOODLIGHT

New! Glare Free CFL Floodlights

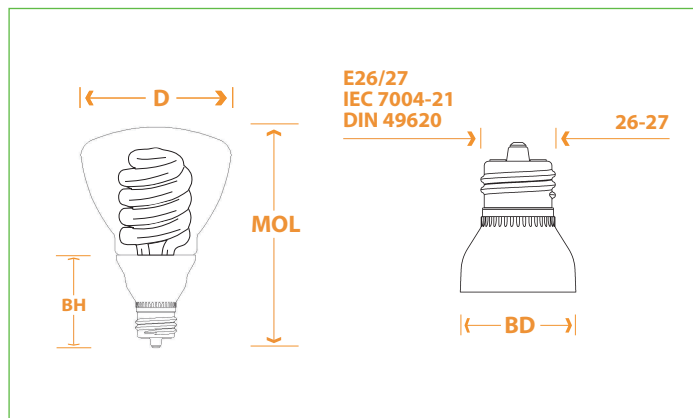

## Technical Data

CFL-R40™ & CFL-R30™ Electronic, NPF, Medium Base (E26/27), 120VAC- 50/60Hz, 10,000 Hours Average Life Incandescent Equivalent

| Item Number | Watts | Line Current | Power Factor | THD   | M.O.L. (Inch) | D (Inch) | BD (Inch) | BH (Inch) | Color Temp. (°K) | CRI | Lumens | Lm/W | Watts | Lumens | Lm/W |
|-------------|-------|--------------|--------------|-------|---------------|----------|-----------|-----------|------------------|-----|--------|------|-------|--------|------|
| 34023       | 23    | 0.360 A      | >0.50        | <150% | 5.750         | 4.625    | 2         | 2.35      | 2750             | >82 | 1150   | 50   | 90    | 990    | 11   |
| 34019       | 19    | 0.310 A      | >0.50        | <150% | 5.750         | 4.625    | 2         | 2.35      | 2750             | >82 | 950    | 50   | 75    | 825    | 11   |
| 34016       | 16    | 0.260 A      | >0.50        | <150% | 5.750         | 4.625    | 2         | 2.35      | 2750             | >82 | 750    | 47   | 65    | 730    | 11   |
| 33016       | 16    | 0.260 A      | >0.50        | <150% | 5.625         | 3.625    | 2         | 2.35      | 2750             | >82 | 750    | 47   | 65    | 725    | 11   |
| 33014       | 14    | 0.230 A      | >0.50        | <150% | 5.625         | 3.625    | 2         | 2.35      | 2750             | >82 | 650    | 46   | 45    | 485    | 11   |

APPLICATION INFORMATION: TO BE USED WITH TRACK LIGHTS • RECESSED CANS • WARDROBE CLOSETS • DRIVEWAYS • WALKWAYS • YARDS & GARDENS OPEN & TOTALLY ENCLOSED FIXTURES • USE WITH OCCUPANCY SENSORS MADE BY NEPTUN • AND MORE

## Features and Benefits

- \* Saves up to 70% energy with comparable light output
- \* Energy Star Certified for 10,000 hours (\*)
- \* Color Temperature of 2750°K: Matching incandescent R lamps
- \* High Luminous Efficiency: Up to 50 Lm/W
- \* Wide range of operation temperatures: 0°F - 120°F
- \* New! Patented Amalgam Technology: Any working position with stable light output
- \* Superior Lumen Maintenance of 85% after 4,000 Hours of use
- \* Indoor or Outdoor

NEPTUN LIGHT, Inc.  
service@neptunlight.com  
Tel. 1-847-735-8330  
Toll Free: 1-888-735-8330



© Copyright 2008 NEPTUN LIGHT, Inc.