


# HELIX-GU24™ ELECTRONIC BULBS

## New! Product Information Bulletin GU-24 TYPE

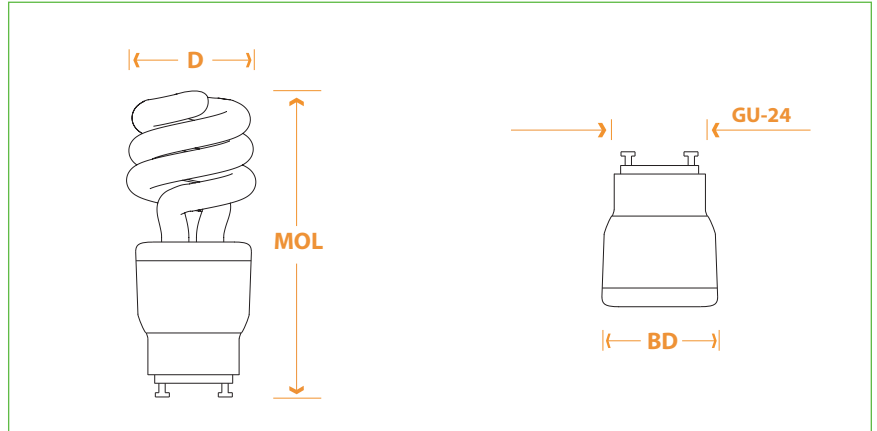

### Technical Data

HELIX™ Electronic, NPF, GU-24 Base, 120VAC- 50/60Hz, 10,000 Hours Average Life												Incandescent Equivalent		
Item Number	Watts	Input Line Current	Power Factor	THD	M.O.L. (Inch)	(D) (Inch)	(BD) (Inch)	Color Temp. (°K)	CRI	Lumens	Lm/W	Watts	Lumens	Lm/W
24513-GU	13	0.180 A	>0.50	<150%	3.875	1.875	1.57	2700	>82	800	62	60	800	13
24514-GU	14	0.230 A	>0.50	<150%	3.875	1.875	1.57	2700	>82	900	66	60	900	15
24523-GU	23	0.400 A	>0.50	<150%	4.500	2.250	1.75	2700	>82	1200	67	75	1150	15
24524-GU	24	0.400 A	>0.50	<150%	4.500	2.250	1.75	2700	>82	1600	67	100	1600	16

APPLICATION INFORMATION: TO BE USED WITH TABLE LAMPS • PENDANT LAMPS • DESK LAMPS • OUTDOOR FIXTURES • TRACK LIGHTS • RECESSED CANS • WARDROBE CLOSETS • DRIVEWAYS • WALKWAYS • YARDS & GARDENS • OPEN & TOTALLY ENCLOSED FIXTURES • USE WITH OCCUPANCY SENSORS MADE BY NEPTUN • AND MORE

### E 26 / GU-24 ADAPTERS

Item Number	Description	Watts MAX.	Voltage	Line Current MAX.	Colors Available	Type
E 26 / GU-24-PL	E 26 / GU-24 Adapter	600	600	1 A	White	Permanent Locking
E 26 / GU-24-NL	E 26 / GU-24 Adapter	600	600	1 A	White	Non-Locking

### Features and Benefits

- \* The most compact CFL's on the market with FULL LIGHT OUTPUT
- \* Saves up to 80% energy with comparable light output
- \* Color Temperature of 2700°K : Matching Incandescent bulbs
- \* High Luminous Efficiency: Up to 67 Lm/W
- \* Very long life: Up to 10 times longer than ordinary bulbs
- \* New! Patented Amalgam Technology
- \* Rapid Start with End of Life Protection and Electronic Preheat
- \* Superior Lumen Maintenance



NEPTUN LIGHT, Inc.  
service@neptunlight.com  
Tel. 1-847-735-8330  
Toll Free: 1-888-735-8330



© Copyright 2008 NEPTUN LIGHT, Inc.